CS® Refraction unit





REFRACTION UNIT

ETOILE II it is an ophthalmic unit with rotating plane designed for 3 ophthalmic instruments, it is available also in the version with a working plane with electronic height adjustment. ETOILE II offers the greatest functional capacity taking up a minimal amount of space and offers an absolute reliability in every working situation. IT is available a version with minimum height of 74 cm, ideal to facilitate the entrance for disabled patients.

The standard version can accomodate: slit lamp, Ophthalmometer and an optional ophthalmic device. It is equipped with a lenses drawer under the instruments plane. The command consoles make it very comfortable for every day use and in all the working conditions. As the whole range of CSO ophthalmic units, ETOILE II can be customized with a wide choice of colors.





Possibility to visit patients with motoric difficulties



Commands console



Plane for keyboard PC. (optional)












Lenses drawer. (not available in the disabled patients version)



Ceiling light with three light sources suitable for every unit
with:
- LED light with adjustable intensity
- with light spot
- upper ambient LED light
(optional)

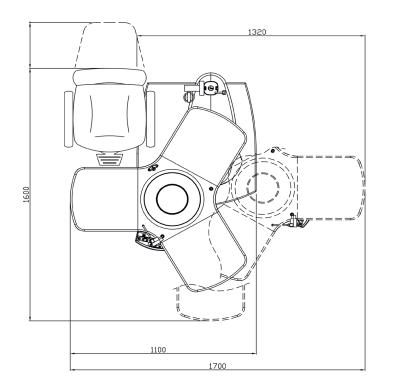

740 - MAX 900 (SPECIALE PER HANDICAP) 830 - MAX 990 (EL. ELETTRICA) 870 (ND ELEVAZIONE) 550 ΝIΜ

STANDARD EQUIPMENT

- Structure with 3 instruments plane
- Column with adjustable LED spotlight
- Column with projector compartment
- Drawer with lenses tray
- Three commands consoles



ACCESSORIES (OPTIONAL)

- Chair with electronic height adjustment
- Working plane with electronic height djustment (from 84 cm to 100 cm and from 74 cm to 90 cm)
- LED spotlightSelf-balancing arm for phoropter
- Support for phoropter armSupport for column plane
- Wood's lamp with arm
- Arrangement video systemArrangement for corneal topographer
- Various supports for columnLCD monitor support
- Wheeled drawer and desk
- Version with opening on the left
- Finishing with special materialsPlane for pc keyboard

ELECTRICAL DATA	Version 230V	Version 120V
Supply voltage	230 Vac ±10%	120 Vac ±10%
Power frequency	50Hz	60Hz
Network fuses	4A T 5x20mm	8A T 5x20mm
Auxiliary sockets (chair and auxiliaries)	230Vac 50Hz	120Vac 60Hz
Max power absorbed by the auxiliary sockets	100 VA	100 VA
Max power absorbed by the unit:	600 VA	600 VA
Voltage for the table instruments	6Vac or 12Vac Ophthalmometer Slit Lamp 6Vac or 12Vac Fixation point of the Chin rest 230 Vac for other diagnostic instrument	

Accessories









Movable spotlight cod. 100811550

Plane for column monitor cod. 100805-03







Ophthalmic headband support

cod. 100805-21





CD monitor support 00805-24

Phoropter support for square section column cod. 100805-10





Lamp with 3 LED lights cod. 100819510



Support for column retinoscope/ophthalmometer cod. 10080518



They make the difference and give personality to the studio furniture.

COLORS LACQUERED - optional

COLORS LACQUERED - Optional		
cod. 107	cod. 132	cod. 135
cod. 156	cod. 162	cod. 223
cod. 218	cod. 208	cod. 187
cod. 757/296-D	cod. 182	cod. 131
cod. 118	cod. 120	cod. 130
cod. 228	cod. 236	cod. 849
cod. 945/C	cod. 244	cod. 259

LACQUED COLORS - standard

cod. 757/296-E	cod. 889/F	cod. 857/C

^{*} The colors are just approximate.

Intensity color variations can be caused by the chemicals reactions of the used matters.

The specifications and the images are not contractually binding and can be modified without notice.