



Battery Handles are separately available.

LED Streak Retinoscopes

**RXRCLED
RXRCUSBLED**

Accessories

Charging Stand **RC-III**

Transilluminator **TI**

USB-C

The Features Various Functions of LED Retinoscopes

**3-8
TIMES**

Brighter Illumination Field

- The streak light model is about three to five times, the spot light model is five to eight times brighter than our halogen bulb models.
- Easily visible screening even in a bright room.

SMOOTH

Smooth Light Control

- Smooth stepless light control from the minimum to the maximum.
- Reduces the burden of the patient caused by photophobia.
- Provides clear reflected light.

BOOST

Boost Mode for More Brightness

- Switchable between Normal mode and much brighter Boost mode.

Ra:90

High Color-rendering LED

- Ra: More than 90, R9: More than 50 Color temperature: 3000K
- No need of light bulb replacement. Maintenance-free LED lifetime: 50,000 hours.

Li-ion

Powered by Li-ion Battery

- Store the Device in the Table-top Charging Stand while charging.

USB-C



Basic Functions



Pursuit of Visibility

The anti-reflection filter provides wide and clear field of view.
This reduces the sense of fatigue due to a long-time use.



Pursuit of Usability

The streak can be easily set at the best position.
The rotation and the width change of the streak are separately controlled.
Rotating the streak does not affect the streak width.
The lightweight retinoscope head rotates freely.



Sharp Streak Light

The precision cut slit realizes the sharp and clear streak light.



Free Streak Rotation

The streak rotates 360 degrees. You can rotate it from any position and is useful for measurement of the axis of myopia.
Furthermore, the retinoscope is equipped with the Head Attachment Mount for eyeglasses wearers and the feature to attach a presbyopia lens easily.



Fixation Card Set

The Fixation Card Set is available for use in dynamic retinoscopy. Consists of two fixation cards and a card holder. (Optional)



Two Types
of fixation card
(Fixation Card Set)

Fixation Card Set FC (Optional)



Card Holder
(For Fixation Card Set RX)



Card Holder
(For Fixation Card Set RX-SP)

Schematic Eye on Stand (Optional)



For use of training


Delivered with




Carrying case

Various Functions

RXLED Head (Streak Retinoscope)

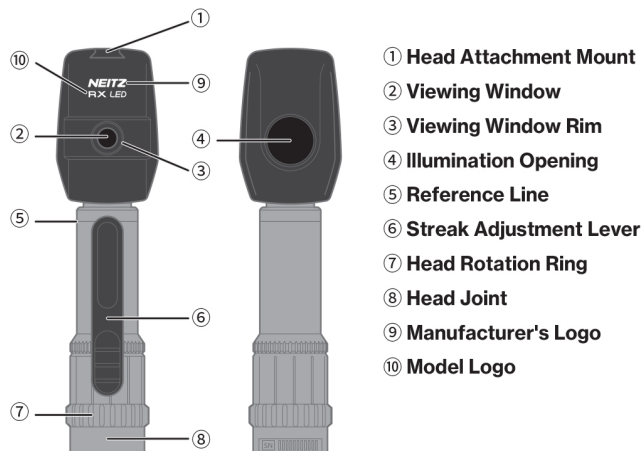


RXSPLED Head (Spot Retinoscope)

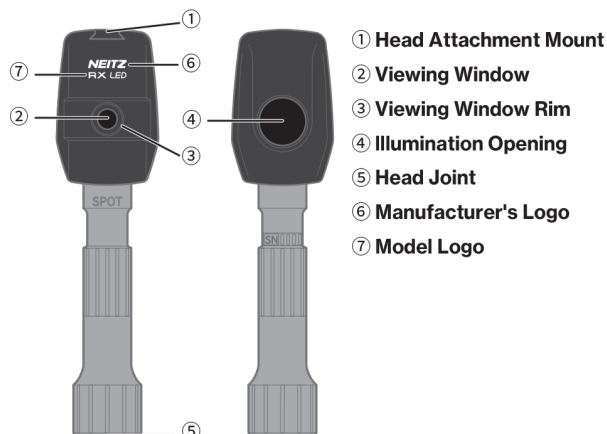


LED Rechargeable Battery Handle

Charged via separately available Charging Stand RC-III.

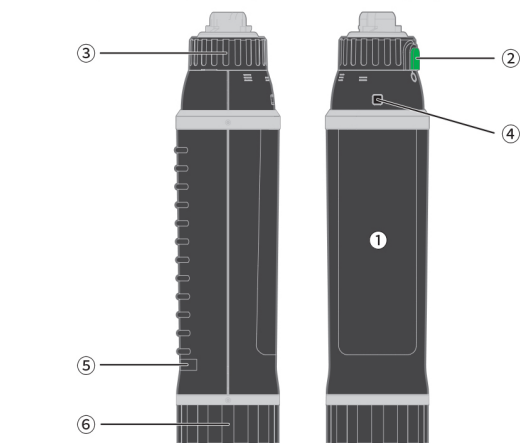


- ① LED Rechargeable Battery Handle (LH-1200)
② Switch Button
③ Switch Ring
④ Pilot Lamp
⑤ Serial Number and Information Mark
⑥ Bottom Cap with Built-in Battery Unit 1200RC
⑦ Charging Contact




USB Charging Handle


Charged via AC Adapter in the Delivery Set.

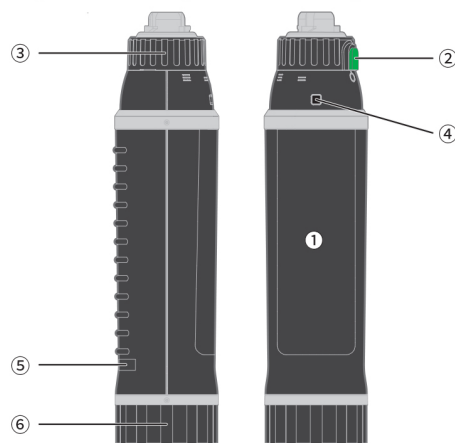


- ① LED Rechargeable Battery Handle (LH-1300)
② Switch Button
③ Switch Ring
④ Pilot Lamp
⑤ Serial Number and Information Mark
⑥ Bottom Cap with Built-in Battery Unit 1300RC
⑦ Rated Voltage Indication
⑧ USB Socket (USB Type-C)
⑨ Status Indicator



Charging Stand RC-III

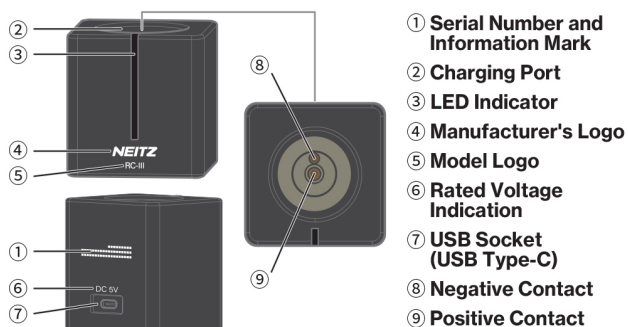

Transilluminator TI

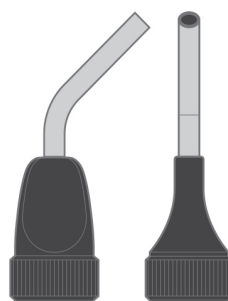

● For use of ophthalmic fixation test, eye position test, and binocular test, etc.
Also for use in the transillumination test.

● Compatible with Neitz Dry-cell Battery Handles and Rechargeable Battery Handles.

Product Specifications LED Streak Retinoscopes RXRCLED & RXRCUSBLED		
Product Name	LED Streak Retinoscope RXRCLED	LED Streak Retinoscope RXRCUSBLED
Generic Name	Retinoscope	
Illumination Source	LED Bulb L-102	
Streak Variations	Divergent Streak, Parallel Streak, Convergent Streak	
Streak Rotation	360° Continuous Rotation	
Battery	1 pc. Lithium-ion battery (rated voltage 3.6V, 3200mAH)	
Maximum Power Consumption	Below 2W (with the head attached)	
Dimensions and Weight	34(W)×269(H)×34(D) Approx.280g (including the rechargeable battery)	34(W)×269(H)×34(D) Approx.285g (including the rechargeable battery)
Optional Accessories	Presbyopic Lens (+1D, +3 D) Fixation Card Set RX	



Product Specifications Charging Stand RC-III	
Product Name	Charging Stand RC-III
Input Power Supply	AC 100V -240V / 50Hz -60Hz, 0.3A
AC Adapter Output	USB Type A connector DC 5V / 2A (maximum)
USB Cable	Type A to C, 1.5m (with overheat and over current protection)
Power Consumption	Below 30VA (while charging)
Dimensions and Weight	60(W)×60(H)×60(D) Approx. 175g (excluding the AC adapter)

Included Accessories

RXRCLED/RXRCSPLED	RXRCUSBLED/RXRCUSBSPLED	RC-III
Carrying case	Carrying case, AC adapter, USB cable	AC adapter, USB cable

Product Specifications Transilluminator TI	
Product Name	Transilluminator TI (Head only)
Generic Name	General-purpose light source
Illumination Source	LED Bulb L-104
Maximum Power Consumption	Below 2W
Dimensions	Head only: Approx. $\Phi 22.5$ mm × 80 mm
Weight	Head only: Approx. 35g (including the LED bulb)



Neitz Instruments Co., Ltd.
 4F Ichibancho Court, 15-21, Ichibancho,
 Chiyoda-ku, Tokyo 102-0082, Japan
 Phone: +81-3-3237-0552 Fax: +81-3-3237-0554
 URL: <https://www.neitz.co.jp/en/>

Distributor



* As part of our policy of continued product improvement, we reserve the right to alter and/or amend specifications at any time without prior notice.
 * The colors in the catalog may be slightly different from those of the actual products .